

## TFT LCD Approval Specification

# MODEL NO.: N121I3 - L02

Customer :        HP

Approved by : \_\_\_\_\_

Note :

| Liquid Crystal Display Division                       |                                                        |
|-------------------------------------------------------|--------------------------------------------------------|
| QRA Division.                                         | OA Head Division.                                      |
| Approval                                              | Approval                                               |
| <div><div>陳</div><div>95.6.2</div><div>永一</div></div> | <div><div>林</div><div>95.5.30</div><div>添仁</div></div> |



## - CONTENTS -

|                                         |       |    |
|-----------------------------------------|-------|----|
| REVISION HISTORY                        | ----- | 3  |
| 1. GENERAL DESCRIPTION                  | ----- | 4  |
| 1.1 OVERVIEW                            |       |    |
| 1.2 FEATURES                            |       |    |
| 1.3 APPLICATION                         |       |    |
| 1.4 GENERAL SPECIFICATIONS              |       |    |
| 1.5 MECHANICAL SPECIFICATIONS           |       |    |
| 2. ABSOLUTE MAXIMUM RATINGS             | ----- | 5  |
| 2.1 ABSOLUTE RATINGS OF ENVIRONMENT     |       |    |
| 2.2 ELECTRICAL ABSOLUTE RATINGS         |       |    |
| 2.2.1 TFT LCD MODULE                    |       |    |
| 2.2.2 BACKLIGHT UNIT                    |       |    |
| 3. ELECTRICAL CHARACTERISTICS           | ----- | 7  |
| 3.1 TFT LCD MODULE                      |       |    |
| 3.2 BACKLIGHT UNIT                      |       |    |
| 4. BLOCK DIAGRAM                        | ----- | 11 |
| 4.1 TFT LCD MODULE                      |       |    |
| 4.2 BACKLIGHT UNIT                      |       |    |
| 5. INPUT TERMINAL PIN ASSIGNMENT        | ----- | 12 |
| 5.1 TFT LCD MODULE                      |       |    |
| 5.2 BACKLIGHT UNIT                      |       |    |
| 5.3 TIMING DIAGRAM OF LVDS INPUT SIGNAL |       |    |
| 5.4 COLOR DATA INPUT ASSIGNMENT         |       |    |
| 5.5 EDID DATA STRUCTURE                 |       |    |
| 5.6 EDID SIGNAL SPECIFICATION           |       |    |
| 6. INTERFACE TIMING                     | ----- | 20 |
| 6.1 INPUT SIGNAL TIMING SPECIFICATIONS  |       |    |
| 6.2 POWER ON/OFF SEQUENCE               |       |    |
| 7. OPTICAL CHARACTERISTICS              | ----- | 22 |
| 7.1 TEST CONDITIONS                     |       |    |
| 7.2 OPTICAL SPECIFICATIONS              |       |    |
| 8. PRECAUTIONS                          | ----- | 25 |
| 8.1 HANDLING PRECAUTIONS                |       |    |
| 8.2 STORAGE PRECAUTIONS                 |       |    |
| 8.3 OPERATION PRECAUTIONS               |       |    |
| 9. PACKING                              | ----- | 26 |
| 9.1 CARTON                              |       |    |
| 9.2 PALLET                              |       |    |
| 10. DEFINITION OF LABELS                | ----- | 28 |
| 10.1 CMO MODULE LABEL                   |       |    |
| 10.2 CARTON LABEL                       |       |    |

**CHI MEI**  
OPTOELECTRONICS CORP.

Issued Date: May. 30, 2006

Model No.: N12113 -L02

**Approval****REVISION HISTORY**

| Version | Date        | Page<br>(New) | Section | Description                          |
|---------|-------------|---------------|---------|--------------------------------------|
| Ver 2.0 | Nov. 28,'05 | All           | All     | Approval specification first issued. |
| Ver 3.0 | Mar 30,'06  | All           | All     | Approval specification for HP        |



## 1 GENERAL DESCRIPTION

### 1.1 OVERVIEW

N121I3 -L02 is a 12.1" TFT Liquid Crystal Display module with single CCFL Backlight unit and 20 pins LVDS interface. This module supports 1280 x 800 Wide-XGA mode and can display 262,144 colors. The optimum viewing angle is at 6 o'clock direction. The inverter module for Backlight is not built in.

### 1.2 FEATURES

- Thin and light weight
- WXGA (1280 x 800 pixels) resolution
- 3.3V LVDS (Low Voltage Differential Signaling) interface with 1 pixel/clock
- Meet RoHS requirement

### 1.3 APPLICATION

- TFT LCD Notebook

### 1.4 GENERAL SPECIFICATIONS

| Item               | Specification                           | Unit  | Note |
|--------------------|-----------------------------------------|-------|------|
| Active Area        | 261.12 (H) x 163.2 (V) (12.1" diagonal) | mm    | (1)  |
| Bezel Opening Area | 263.12 (H) x 165.2 (V)                  | mm    |      |
| Driver Element     | a-si TFT active matrix                  | -     | -    |
| Pixel Number       | 1280 x R.G.B. x 800                     | pixel | -    |
| Pixel Pitch        | 0.204 (H) x 0.204 (V)                   | mm    | -    |
| Pixel Arrangement  | RGB vertical stripe                     | -     | -    |
| Display Colors     | 262,144                                 | color | -    |
| Transmissive Mode  | Normally white                          | -     | -    |
| Surface Treatment  | Hard coating (3H), Anti-glare type      | -     | -    |

### 1.5 MECHANICAL SPECIFICATIONS

| Item        |               | Min.  | Typ.  | Max.  | Unit | Note |
|-------------|---------------|-------|-------|-------|------|------|
| Module Size | Horizontal(H) | 275.3 | 275.8 | 276.3 | mm   | (1)  |
|             | Vertical(V)   | 177.4 | 178   | 178.6 | mm   |      |
|             | Depth(D)      | -     | 4.9   | 5.2   | mm   |      |
| Weight      |               | -     | 260   | 275   | g    | -    |

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

## 2 ABSOLUTE MAXIMUM RATINGS

### 2.1 ABSOLUTE RATINGS OF ENVIRONMENT


| Item                          | Symbol           | Value |       | Unit | Note     |
|-------------------------------|------------------|-------|-------|------|----------|
|                               |                  | Min.  | Max.  |      |          |
| Storage Temperature           | T <sub>ST</sub>  | -20   | +60   | °C   | (1)      |
| Operating Ambient Temperature | T <sub>OP</sub>  | 0     | +50   | °C   | (1), (2) |
| Shock (Non-Operating)         | S <sub>NOP</sub> | -     | 200/2 | G/ms | (3), (5) |
| Vibration (Non-Operating)     | V <sub>NOP</sub> | -     | 1.5   | G    | (4), (5) |

Note (1) (a) 90 %RH Max. (Ta ≤ 40 °C).

(b) Wet-bulb temperature should be 39 °C Max. (Ta > 40 °C).

(c) No condensation.

Note (2) The temperature of panel display surface area should be 0 °C Min. and 60 °C Max.

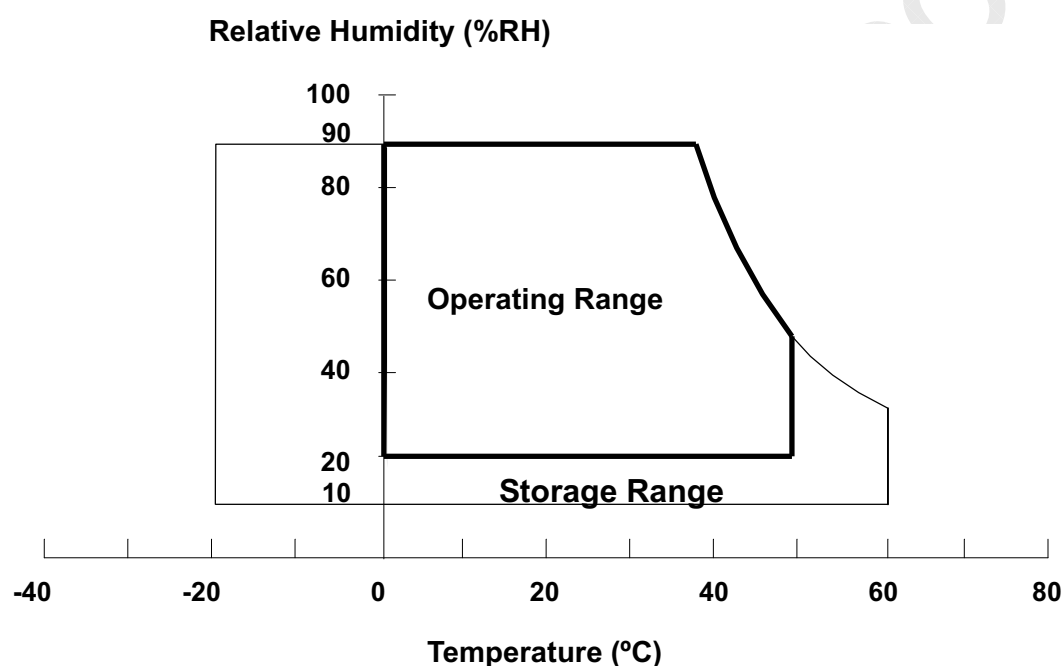


Note (3) 1 time for ± X, ± Y, ± Z. for Condition (200G / 2ms) is half Sine Wave,.

Note (4) 10 ~ 500 Hz, 30 min/cycle, 1 cycles for each X, Y, Z axis.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

The fixing condition is shown as below:

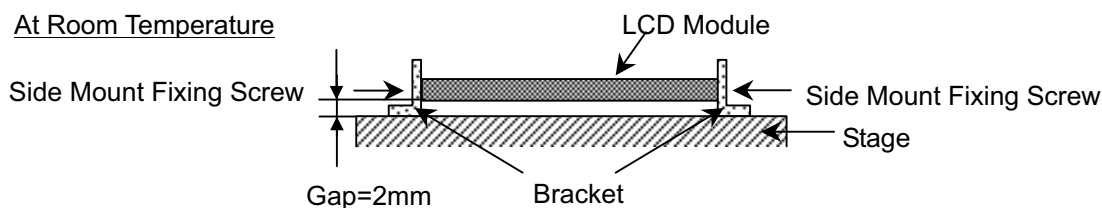



## 2.2 ELECTRICAL ABSOLUTE RATINGS

### 2.2.1 TFT LCD MODULE

| Item                 | Symbol          | Value |                      | Unit | Note |
|----------------------|-----------------|-------|----------------------|------|------|
|                      |                 | Min.  | Max.                 |      |      |
| Power Supply Voltage | V <sub>CC</sub> | -0.3  | +4.0                 | V    | (1)  |
| Logic Input Voltage  | V <sub>IN</sub> | -0.3  | V <sub>CC</sub> +0.3 | V    |      |

### 2.2.2 BACKLIGHT UNIT

| Item           | Symbol         | Value |      | Unit              | Note                              |
|----------------|----------------|-------|------|-------------------|-----------------------------------|
|                |                | Min.  | Max. |                   |                                   |
| Lamp Voltage   | V <sub>L</sub> | -     | 2.5K | V <sub>RMS</sub>  | (1), (2), I <sub>L</sub> = 6.0 mA |
| Lamp Current   | I <sub>L</sub> | 3.0   | 6.5  | mA <sub>RMS</sub> | (1), (2)                          |
| Lamp Frequency | F <sub>L</sub> | 45    | 80   | KHz               |                                   |

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for lamp (Refer to Section 3.2 for further information)

### 3 ELECTRICAL CHARACTERISTICS


#### 3.1 TFT LCD MODULE

 $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$ 


| Parameter                              |       | Symbol                | Value |       |       | Unit | Note                          |
|----------------------------------------|-------|-----------------------|-------|-------|-------|------|-------------------------------|
|                                        |       |                       | Min.  | Typ.  | Max.  |      |                               |
| Power Supply Voltage                   |       | V <sub>CC</sub>       | 3.0   | 3.3   | 3.6   | V    | -                             |
| Ripple Voltage                         |       | V <sub>RP</sub>       | -     |       | 100   | mV   | -                             |
| Rush Current                           |       | I <sub>RUSH</sub>     | -     | 1.2   | 1.5   | A    | (2)                           |
| Power Supply Current                   | White | I <sub>CC</sub>       | -     | 270   | 300   | mA   | (3)a                          |
|                                        | Black |                       | -     | 330   | 360   | mA   | (3)b                          |
| LVDS Differential Input High Threshold |       | V <sub>TH(LVDS)</sub> |       |       | +100  | mV   | (5),<br>V <sub>CM</sub> =1.2V |
| LVDS Differential Input Low Threshold  |       | V <sub>TL(LVDS)</sub> | -100  |       |       | mV   | (5)<br>V <sub>CM</sub> =1.2V  |
| LVDS Common Mode Voltage               |       | V <sub>CM</sub>       | 1.125 |       | 1.375 | V    | (5)                           |
| LVDS Differential Input Voltage        |       | V <sub>ID</sub>       | 100   |       | 600   | mV   | (5)                           |
| Terminating Resistor                   |       | R <sub>T</sub>        | -     | 100   | -     | Ohm  | -                             |
| Power per EBL WG                       |       | P <sub>FBI</sub>      | -     | 2.873 | -     | W    | (4)                           |

Note (1) The module should be always operated within above ranges.

Note (2) Measurement Conditions:

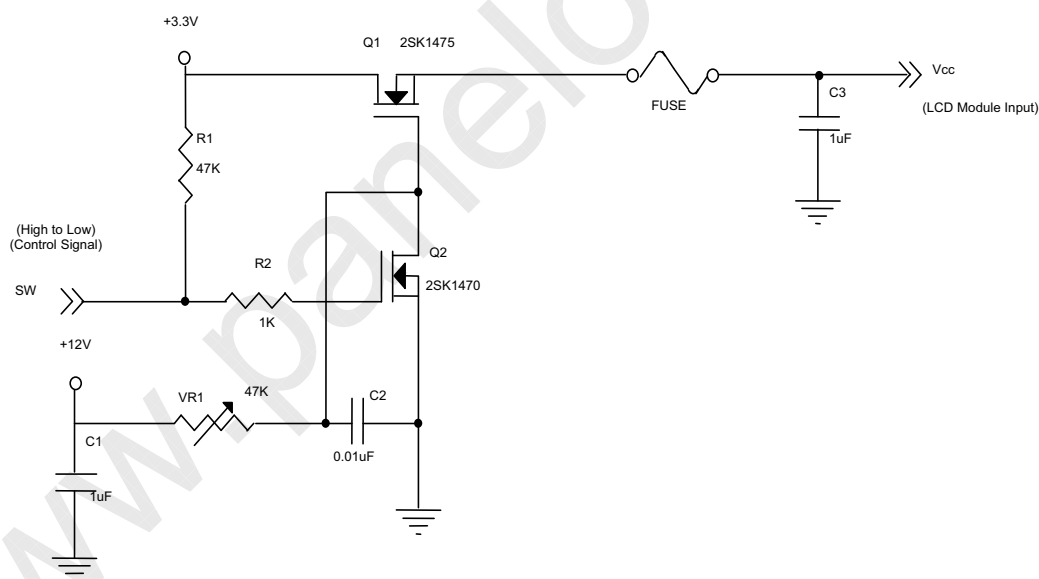

**Vcc rising time is 470us**

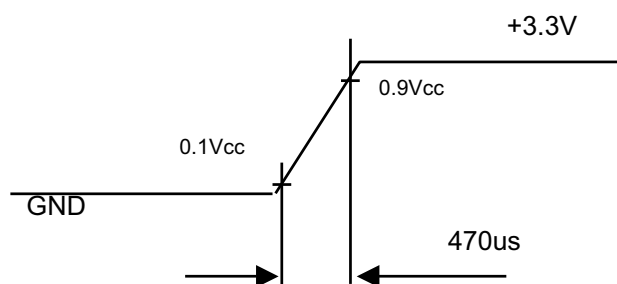


Note (3) The specified power supply current is under the conditions at  $V_{CC} = 3.3\text{ V}$ ,  $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$ , DC Current and  $f_v = 60\text{ Hz}$ , whereas a power dissipation check pattern below is displayed.

a. White Pattern



Active Area

b. Black Pattern




Active Area

Note (4) The specified power are the sum of LCD panel electronics input power and the inverter input power. Test conditions are as follows.

- (a)  $V_{CC} = 3.3\text{ V}$ ,  $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$ ,  $f_v = 60\text{ Hz}$ ,
- (b) The pattern used is a black and white 32 x 36 checkerboard, slide #100 from the VESA file "Flat Panel Display Monitor Setup Patterns", FPDMSU.ppt.
- (c) Luminance: 60 nits.
- (d) The inverter used is provided from O2Micro([www.o2micro.com](http://www.o2micro.com)). CMO doesn't provide the inverter in this product.

Note (5) The parameters of LVDS signals are defined as the following figures.

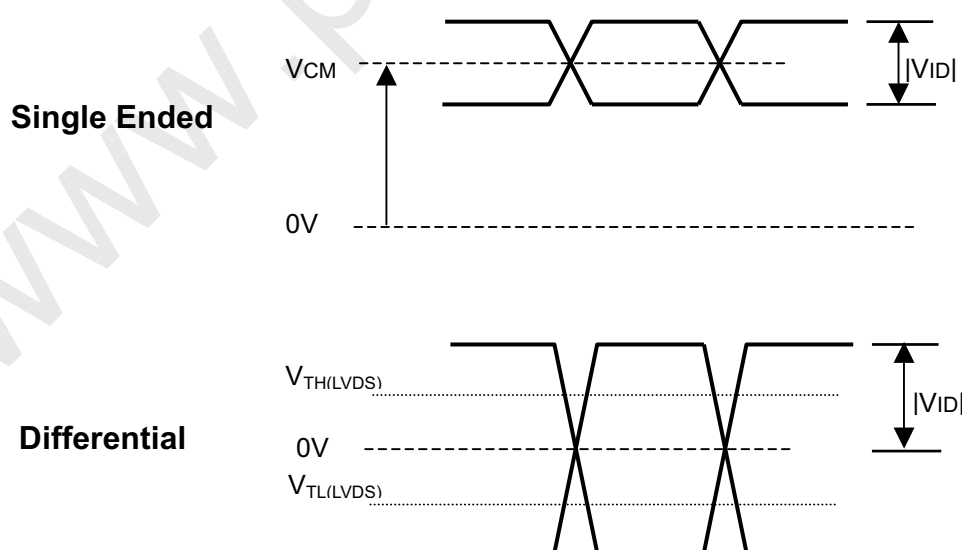




## 3.2 BACKLIGHT UNIT

Ta = 25 ± 2 °C

| Parameter            | Symbol          | Value  |      |                  | Unit              | Note                         |
|----------------------|-----------------|--------|------|------------------|-------------------|------------------------------|
|                      |                 | Min.   | Typ. | Max.             |                   |                              |
| Lamp Input Voltage   | V <sub>L</sub>  | 540    | 600  | 660              | V <sub>RMS</sub>  | I <sub>L</sub> = 6.0 mA      |
| Lamp Current         | I <sub>L</sub>  | 2.0    | 6.0  | 6.5              | mA <sub>RMS</sub> | (1),(2)                      |
|                      |                 | 3.0    |      |                  |                   | (1),(3)                      |
| Lamp Turn On Voltage | V <sub>S</sub>  | -      | -    | 1,220 (25 deg C) | V <sub>RMS</sub>  | (4)                          |
|                      |                 | -      | -    | 1,380 (0 deg C)  | V <sub>RMS</sub>  | (4)                          |
| Operating Frequency  | F <sub>L</sub>  | 45     | -    | 80               | KHz               | (5)                          |
| Lamp Life Time       | L <sub>BL</sub> | 10,000 | -    | -                | Hrs               | (7)                          |
| Power Consumption    | P <sub>L</sub>  | -      | 3.6  | -                | W                 | (4), I <sub>L</sub> = 6.0 mA |

Note (1) Lamp current is measured by utilizing a high frequency current meter as shown below:

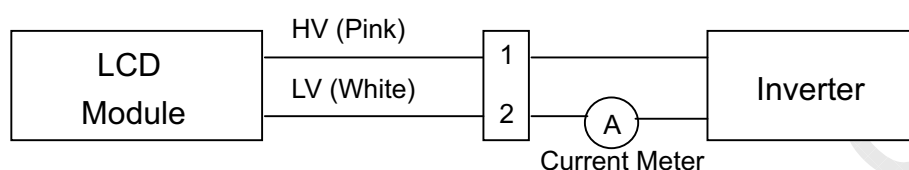

Note (2) for burst mode inverter design

Note (3) for continuous mode inverter design

Note (4) The voltage shown above should be applied to the lamp for more than 1 second after startup. Otherwise the lamp may not be turned on.

Note (5) The lamp frequency may generate interference with horizontal synchronous frequency from the display, and this may cause line flow on the display. In order to avoid interference, the lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible.

Note (6)  $P_L = I_L \times V_L$

Note (7) The lifetime of lamp is defined as the time when it continues to operate under the conditions at Ta = 25 ± 2 °C and I<sub>L</sub> = 6.0 mA<sub>RMS</sub> until one of the following events occurs:

(a) When the brightness becomes ≤ 50% of its original value.

(b) When the effective ignition length becomes ≤ 80% of its original value. (Effective ignition length is defined as an area that the brightness is less than 70% compared to the center point.)


Note (8) The waveform of the voltage output of inverter must be area-symmetric and the design of the inverter must have specifications for the modularized lamp. The performance of the Backlight, such as lifetime or brightness, is greatly influenced by the characteristics of the DC-AC inverter for the lamp. All the parameters of an inverter should be carefully designed to avoid generating too much current leakage from high voltage output of the inverter. When designing or ordering the inverter please make sure that a poor lighting caused by the mismatch of the Backlight and the inverter (miss-lighting, flicker, etc.) never occurs. If the above situation is confirmed, the module should be operated in the same manners when it is installed in your instrument.

The output of the inverter must have symmetrical (negative and positive) voltage waveform and symmetrical current waveform. (Unsymmetrical ratio is less than 10%) Please do not use the inverter

which has unsymmetrical voltage and unsymmetrical current and spike wave. Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.

Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp. It shall help increase the lamp lifetime and reduce its leakage current.

- The asymmetry rate of the inverter waveform should be 10% below;
- The distortion rate of the waveform should be within  $\sqrt{2} \pm 10\%$ ;
- The ideal sine wave form shall be symmetric in positive and negative polarities.

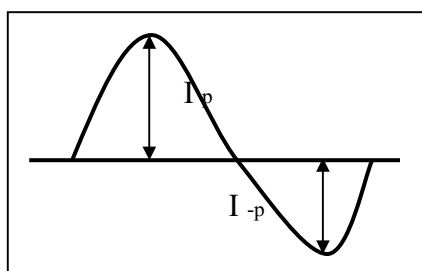

\* Asymmetry rate:


$$|I_p - I_{-p}| / I_{rms} * 100\%$$

\* Distortion rate


$$I_p \text{ (or } I_{-p}) / I_{rms}$$

## 4 BLOCK DIAGRAM

### 4.1 TFT LCD MODULE

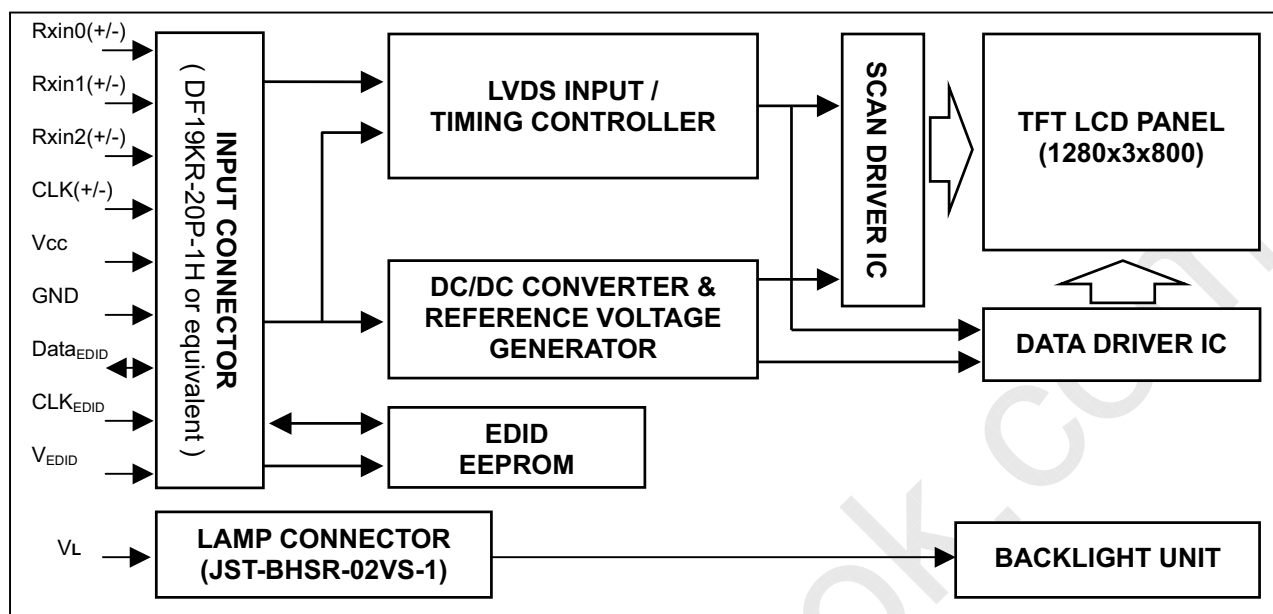

### 4.2 BACKLIGHT UNIT

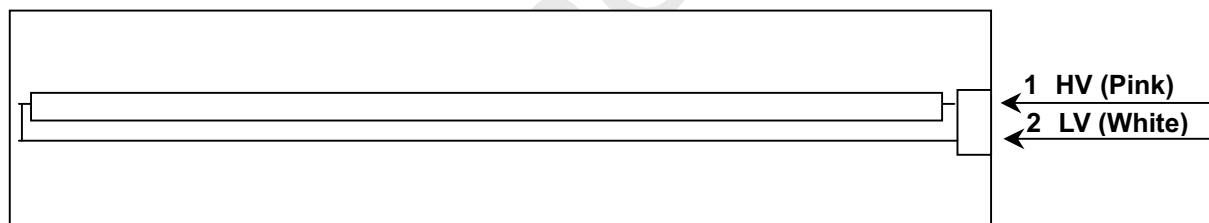



## 5.4 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color. The higher the binary input the brighter the color. The table below provides the assignment of color versus data input.

| Color               |               | Data Signal |    |    |    |    |    |       |    |    |    |    |    |      |    |    |    |    |    |
|---------------------|---------------|-------------|----|----|----|----|----|-------|----|----|----|----|----|------|----|----|----|----|----|
|                     |               | Red         |    |    |    |    |    | Green |    |    |    |    |    | Blue |    |    |    |    |    |
|                     |               | R5          | R4 | R3 | R2 | R1 | R0 | G5    | G4 | G3 | G2 | G1 | G0 | B5   | B4 | B3 | B2 | B1 | B0 |
| Basic Colors        | Black         | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red           | 1           | 1  | 1  | 1  | 1  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green         | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Blue          | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 1  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Cyan          | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 1  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Magenta       | 1           | 1  | 1  | 1  | 1  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Yellow        | 1           | 1  | 1  | 1  | 1  | 1  | 1     | 1  | 1  | 1  | 1  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | White         | 1           | 1  | 1  | 1  | 1  | 1  | 1     | 1  | 1  | 1  | 1  | 1  | 1    | 1  | 1  | 1  | 1  | 1  |
| Gray Scale Of Red   | Red(0)/Dark   | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(1)        | 0           | 0  | 0  | 0  | 0  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(2)        | 0           | 0  | 0  | 0  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Red(61)       | 1           | 1  | 1  | 1  | 0  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(62)       | 1           | 1  | 1  | 1  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
| Red(63)             | 1             | 1           | 1  | 1  | 1  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  |    |
| Gray Scale Of Green | Green(0)/Dark | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(1)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 1  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(2)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 1  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Green(61)     | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 0  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(62)     | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
| Green(63)           | 0             | 0           | 0  | 0  | 0  | 0  | 1  | 1     | 1  | 1  | 1  | 1  | 0  | 0    | 0  | 0  | 0  | 0  |    |
| Gray Scale Of Blue  | Blue(0)/Dark  | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Blue(1)       | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 1  |
|                     | Blue(2)       | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 1  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Blue(61)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 1  | 1    | 1  | 1  | 0  | 1  | 1  |
|                     | Blue(62)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 1  | 1    | 1  | 1  | 1  | 1  | 0  |
| Blue(63)            | 0             | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 1  | 1  | 1    | 1  | 1  | 1  | 1  |    |

Note (1) 0: Low Level Voltage, 1: High Level Voltage

## 5.5 EDID DATA STRUCTURE

The EDID (Extended Display Identification Data) data formats are to support displays as defined in the VESA Plug & Display and FPD1 standards.

| Byte #<br>(decimal) | Byte #<br>(hex) | Field Name and Comments                             | Value<br>(hex) | Value<br>(binary) |
|---------------------|-----------------|-----------------------------------------------------|----------------|-------------------|
| 0                   | 0               | Header                                              | 00             | 00000000          |
| 1                   | 1               | Header                                              | FF             | 11111111          |
| 2                   | 2               | Header                                              | FF             | 11111111          |
| 3                   | 3               | Header                                              | FF             | 11111111          |
| 4                   | 4               | Header                                              | FF             | 11111111          |
| 5                   | 5               | Header                                              | FF             | 11111111          |
| 6                   | 6               | Header                                              | FF             | 11111111          |
| 7                   | 7               | Header                                              | 00             | 00000000          |
| 8                   | 8               | EISA ID manufacturer name ("CMO")                   | 0D             | 00001101          |
| 9                   | 9               | EISA ID manufacturer name (Compressed ASCII)        | AF             | 10101111          |
| 10                  | 0A              | ID product code                                     | 11             | 00010001          |
| 11                  | 0B              | ID product code                                     | 12             | 00010010          |
| 12                  | 0C              | ID S/N (fixed "0")                                  | 00             | 00000000          |
| 13                  | 0D              | ID S/N (fixed "0")                                  | 00             | 00000000          |
| 14                  | 0E              | ID S/N (fixed "0")                                  | 00             | 00000000          |
| 15                  | 0F              | ID S/N (fixed "0")                                  | 00             | 00000000          |
| 16                  | 10              | Week of manufacture (fixed week code)               | 01             | 00000001          |
| 17                  | 11              | Year of manufacture (fixed year code)               | 10             | 00010000          |
| 18                  | 12              | EDID structure version # ("1")                      | 01             | 00000001          |
| 19                  | 13              | EDID revision # ("3")                               | 03             | 00000011          |
| 20                  | 14              | Video I/P definition ("digital")                    | 80             | 10000000          |
| 21                  | 15              | Max H image size ("26cm")                           | 1A             | 00011010          |
| 22                  | 16              | Max V image size ("16cm")                           | 10             | 00010000          |
| 23                  | 17              | Display Gamma (Gamma = "2.2")                       | 78             | 01111000          |
| 24                  | 18              | Feature support ("Active off, RGB Color")           | 0A             | 00001010          |
| 25                  | 19              | Red/Green (Rx1, Rx0, Ry1, Ry0, Gx1, Gx0, Gy1, Gy0)  | FC             | 11111100          |
| 26                  | 1A              | Blue/White (Bx1, Bx0, By1, By0, Wx1, Wx0, Wy1, Wy0) | C5             | 11000101          |
| 27                  | 1B              | Red-x (Rx = "0.573")                                | 92             | 10010010          |
| 28                  | 1C              | Red-y (Ry = "0.339")                                | 56             | 01010110          |
| 29                  | 1D              | Green-x (Gx = "0.327")                              | 53             | 01010011          |
| 30                  | 1E              | Green-y (Gy = "0.566")                              | 91             | 10010001          |
| 31                  | 1F              | Blue-x (Bx = "0.151")                               | 26             | 00100110          |
| 32                  | 20              | Blue-y (By = "0.125")                               | 20             | 00100000          |
| 33                  | 21              | White-x (Wx = "0.313")                              | 50             | 01010000          |
| 34                  | 22              | White-y (Wy = "0.329")                              | 54             | 01010100          |
| 35                  | 23              | Established timings 1                               | 00             | 00000000          |
| 36                  | 24              | Established timings 2                               | 08             | 00001000          |
| 37                  | 25              | Manufacturer's reserved timings                     | 00             | 00000000          |
| 38                  | 26              | Standard timing ID # 1                              | 01             | 00000001          |
| 39                  | 27              | Standard timing ID # 1                              | 01             | 00000001          |
| 40                  | 28              | Standard timing ID # 2                              | 01             | 00000001          |
| 41                  | 29              | Standard timing ID # 2                              | 01             | 00000001          |

|    |    |                                                                                                                                                          |    |          |
|----|----|----------------------------------------------------------------------------------------------------------------------------------------------------------|----|----------|
| 42 | 2A | Standard timing ID # 3                                                                                                                                   | 01 | 00000001 |
| 43 | 2B | Standard timing ID # 3                                                                                                                                   | 01 | 00000001 |
| 44 | 2C | Standard timing ID # 4                                                                                                                                   | 01 | 00000001 |
| 45 | 2D | Standard timing ID # 4                                                                                                                                   | 01 | 00000001 |
| 46 | 2E | Standard timing ID # 5                                                                                                                                   | 01 | 00000001 |
| 47 | 2F | Standard timing ID # 5                                                                                                                                   | 01 | 00000001 |
| 48 | 30 | Standard timing ID # 6                                                                                                                                   | 01 | 00000001 |
| 49 | 31 | Standard timing ID # 6                                                                                                                                   | 01 | 00000001 |
| 50 | 32 | Standard timing ID # 7                                                                                                                                   | 01 | 00000001 |
| 51 | 33 | Standard timing ID # 7                                                                                                                                   | 01 | 00000001 |
| 52 | 34 | Standard timing ID # 8                                                                                                                                   | 01 | 00000001 |
| 53 | 35 | Standard timing ID # 8                                                                                                                                   | 01 | 00000001 |
| 54 | 36 | Detailed timing description # 1 Pixel clock ("71MHz", According to VESA CVT Rev1.1)                                                                      | BC | 10111100 |
| 55 | 37 | # 1 Pixel clock (hex LSB first)                                                                                                                          | 1B | 00011011 |
| 56 | 38 | # 1 H active ("1280")                                                                                                                                    | 00 | 00000000 |
| 57 | 39 | # 1 H blank ("160")                                                                                                                                      | A0 | 10100000 |
| 58 | 3A | # 1 H active : H blank ("1280 : 160")                                                                                                                    | 50 | 01010000 |
| 59 | 3B | # 1 V active ("800")                                                                                                                                     | 20 | 00100000 |
| 60 | 3C | # 1 V blank ("23")                                                                                                                                       | 17 | 00010111 |
| 61 | 3D | # 1 V active : V blank ("800 : 23")                                                                                                                      | 30 | 00110000 |
| 62 | 3E | # 1 H sync offset ("48")                                                                                                                                 | 30 | 00110000 |
| 63 | 3F | # 1 H sync pulse width ("32")                                                                                                                            | 20 | 00100000 |
| 64 | 40 | # 1 V sync offset : V sync pulse width ("3 : 6")                                                                                                         | 36 | 00110110 |
| 65 | 41 | # 1 H sync offset : H sync pulse width : V sync offset : V sync width ("48: 32 : 3 : 6")                                                                 | 00 | 00000000 |
| 66 | 42 | # 1 H image size ("261 mm")                                                                                                                              | 05 | 00000101 |
| 67 | 43 | # 1 V image size ("163 mm")                                                                                                                              | A3 | 10100011 |
| 68 | 44 | # 1 H image size : V image size ("261 : 163")                                                                                                            | 10 | 00010000 |
| 69 | 45 | # 1 H boarder ("0")                                                                                                                                      | 00 | 00000000 |
| 70 | 46 | # 1 V boarder ("0")                                                                                                                                      | 00 | 00000000 |
| 71 | 47 | # 1 Non-interlaced, Normal, no stereo, Separate sync, H/V pol Negatives, DE only note: LSB is set to "1" if panel is DE-timing only. H/V can be ignored. | 18 | 00011000 |
| 72 | 48 | Detailed timing description # 2                                                                                                                          | 00 | 00000000 |
| 73 | 49 | # 2 Flag                                                                                                                                                 | 00 | 00000000 |
| 74 | 4A | # 2 Reserved                                                                                                                                             | 00 | 00000000 |
| 75 | 4B | # 2 FE (hex) defines ASCII string (Model Name "N121I3-L02", ASCII)                                                                                       | FE | 11111110 |
| 76 | 4C | # 2 Flag                                                                                                                                                 | 00 | 00000000 |
| 77 | 4D | # 2 1st character of name ("N")                                                                                                                          | 4E | 01001110 |
| 78 | 4E | # 2 2nd character of name ("1")                                                                                                                          | 31 | 00110001 |
| 79 | 4F | # 2 3rd character of name ("2")                                                                                                                          | 32 | 00110010 |
| 80 | 50 | # 2 4th character of name ("1")                                                                                                                          | 31 | 00110001 |
| 81 | 51 | # 2 5th character of name ("I")                                                                                                                          | 49 | 01001001 |
| 82 | 52 | # 2 6th character of name ("3")                                                                                                                          | 33 | 00110011 |
| 83 | 53 | # 2 7th character of name ("-")                                                                                                                          | 2D | 00101101 |
| 84 | 54 | # 2 8th character of name ("L")                                                                                                                          | 4C | 01001100 |
| 85 | 55 | # 2 9th character of name ("0")                                                                                                                          | 30 | 00110000 |





|     |    |                                                                             |    |          |
|-----|----|-----------------------------------------------------------------------------|----|----------|
| 86  | 56 | # 2 10th character of name ("2")                                            | 32 | 00110010 |
| 87  | 57 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 0A | 00001010 |
| 88  | 58 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 89  | 59 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 90  | 5A | Detailed timing description # 3                                             | 00 | 00000000 |
| 91  | 5B | # 3 Flag                                                                    | 00 | 00000000 |
| 92  | 5C | # 3 Reserved                                                                | 00 | 00000000 |
| 93  | 5D | # 3 FE (hex) defines ASCII string (Vendor "CMO", ASCII)                     | FE | 11111110 |
| 94  | 5E | # 3 Flag                                                                    | 00 | 00000000 |
| 95  | 5F | # 3 1st character of string ("C")                                           | 43 | 01000011 |
| 96  | 60 | # 3 2nd character of string ("M")                                           | 4D | 01001101 |
| 97  | 61 | # 3 3rd character of string ("O")                                           | 4F | 01001111 |
| 98  | 62 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 0A | 00001010 |
| 99  | 63 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 100 | 64 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 101 | 65 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 102 | 66 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 103 | 67 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 104 | 68 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 105 | 69 | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 106 | 6A | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 107 | 6B | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 108 | 6C | Detailed timing description # 4                                             | 00 | 00000000 |
| 109 | 6D | # 4 Flag                                                                    | 00 | 00000000 |
| 110 | 6E | # 4 Reserved                                                                | 00 | 00000000 |
| 111 | 6F | # 4 FE (hex) defines ASCII string (Model Name "N121I3-L02", ASCII)          | FE | 11111110 |
| 112 | 70 | # 4 Flag                                                                    | 00 | 00000000 |
| 113 | 71 | # 4 1st character of name ("N")                                             | 4E | 01001110 |
| 114 | 72 | # 4 2nd character of name ("1")                                             | 31 | 00110001 |
| 115 | 73 | # 4 3rd character of name ("2")                                             | 32 | 00110010 |
| 116 | 74 | # 4 4th character of name ("1")                                             | 31 | 00110001 |
| 117 | 75 | # 4 5th character of name ("I")                                             | 49 | 01001001 |
| 118 | 76 | # 4 6th character of name ("3")                                             | 33 | 00110011 |
| 119 | 77 | # 4 7th character of name ("-")                                             | 2D | 00101101 |
| 120 | 78 | # 4 8th character of name ("L")                                             | 4C | 01001100 |
| 121 | 79 | # 4 9th character of name ("0")                                             | 30 | 00110000 |
| 122 | 7A | # 4 10th character of name ("2")                                            | 32 | 00110010 |
| 123 | 7B | (If <13 char, then terminate with ASCII code 0Ah, set remaining             | 0A | 00001010 |



**CHI MEI**  
OPTOELECTRONICS CORP.

Issued Date: May. 30, 2006

Model No.: N12113 -L02


**Approval**

|     |    |                                                                             |    |          |
|-----|----|-----------------------------------------------------------------------------|----|----------|
|     |    | char = 20h)                                                                 |    |          |
| 124 | 7C | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 125 | 7D | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 20 | 00100000 |
| 126 | 7E | Extension flag                                                              | 00 | 00000000 |
| 127 | 7F | Checksum                                                                    | CA | 11001010 |

## 5.6 EDID SIGNAL SPECIFICATION

### (1) EDID Power

| Parameter            | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|----------------------|--------|----------------|------|------|------|------|
| Power supply voltage | Vcc    | —              | 1.8  | —    | 5.5  | V    |

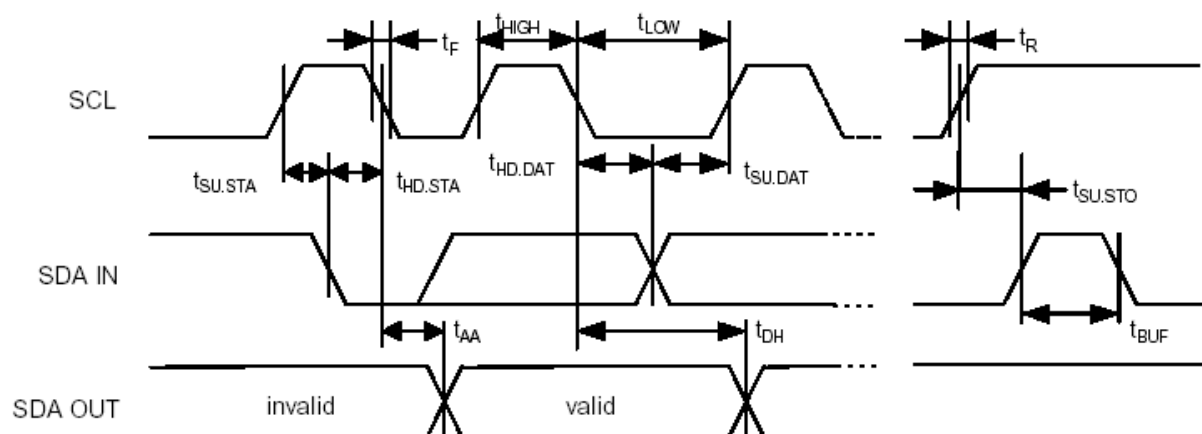

### (2) DC characteristics

| Parameter                 | Symbol | Test Condition  | Min       | Typ | Max       | Unit |
|---------------------------|--------|-----------------|-----------|-----|-----------|------|
| Supply current Vcc=5.0V   | Icc    | READ at 100kHz  | —         | 0.4 | 1.0       | mA   |
| Supply current Vcc=5.0V   | Icc    | WRITE at 100kHz | —         | 2.0 | 3.0       | mA   |
| Standby Current           | ISB    | Vin=Vcc or Vss  | —         | 1.6 | 4.0       | μA   |
| Input Leakage Current     | ILI    | Vin=Vcc or Vss  | —         | 0.1 | 10        | μA   |
| Onput Leakage Current     | ILO    | Vout=Vcc or Vss | —         | 0.1 | 10        | μA   |
| Input Low Level           | VIL    | —               | -1.0      | —   | Vcc x 0.3 | V    |
| Input High Level          | VIH    | —               | Vcc x 0.7 | —   | Vcc+0.5   | V    |
| Output Low Level Vcc=3.0V | VOL1   | IOL=3mA         | —         | —   | 0.4       | V    |
| Output Low Level Vcc=1.8V | VOL2   | IOL=1.5mA       | —         | —   | 0.5       | V    |

## (3) AC characteristics (VCC=1.8~5.5V standard operation mode)

| Parameter                                                     | Symbol              | Min | Max | Unit |
|---------------------------------------------------------------|---------------------|-----|-----|------|
| Clock Frequency, SCL                                          | F <sub>SCL</sub>    | —   | 100 | kHz  |
| Clock Pulse Width Low                                         | T <sub>LOW</sub>    | 4.7 | —   | μs   |
| Clock Pulse Width High                                        | T <sub>HIGH</sub>   | 4.0 | —   | μs   |
| Noise Suppression Time                                        | T <sub>I</sub>      | —   | 100 | ns   |
| Clock Low to Data Out Valid                                   | T <sub>AA</sub>     | 0.1 | 4.5 | μs   |
| Time the bus must be free before a new transmission can start | T <sub>BUF</sub>    | 4.7 | —   | μs   |
| Start Hold Time                                               | T <sub>HD.STA</sub> | 4.7 | —   | μs   |
| Start Set-up Time                                             | T <sub>SU.STA</sub> | 4.7 | —   | μs   |
| Data in Hold Time                                             | T <sub>HD.DAT</sub> | 0   | —   | μs   |
| Data in Set-up Time                                           | T <sub>SU.DAT</sub> | 200 | —   | ns   |
| Inputs Rise Time                                              | T <sub>R</sub>      | —   | 1.0 | μs   |
| Inputs Fall Time                                              | T <sub>F</sub>      | —   | 300 | ns   |
| Stop Set-up Time                                              | T <sub>SU.STO</sub> | 4.7 | —   | μs   |
| Data Out Hold Time                                            | T <sub>DH</sub>     | 100 | —   | ns   |
| Write Cycle Time                                              | T <sub>WR</sub>     | —   | 10  | ms   |


## 6 INTERFACE TIMING

### 6.1 INPUT SIGNAL TIMING SPECIFICATIONS


The input signal timing specifications are shown as the following table and timing diagram.

| Signal | Item                       | Symbol | Min. | Typ. | Max. | Unit | Note |
|--------|----------------------------|--------|------|------|------|------|------|
| DCLK   | Frequency                  | 1/Tc   | -    | 71   | 73   | MHz  | -    |
| DE     | Vertical Total Time        | TV     | 802  | 823  | 840  | TH   | -    |
|        | Vertical Addressing Time   | TVD    | 800  | 800  | 800  | TH   | -    |
|        | Horizontal Total Time      | TH     | 1380 | 1440 | 1450 | Tc   | -    |
|        | Horizontal Addressing Time | THD    | 1280 | 1280 | 1280 | Tc   | -    |

#### INPUT SIGNAL TIMING DIAGRAM

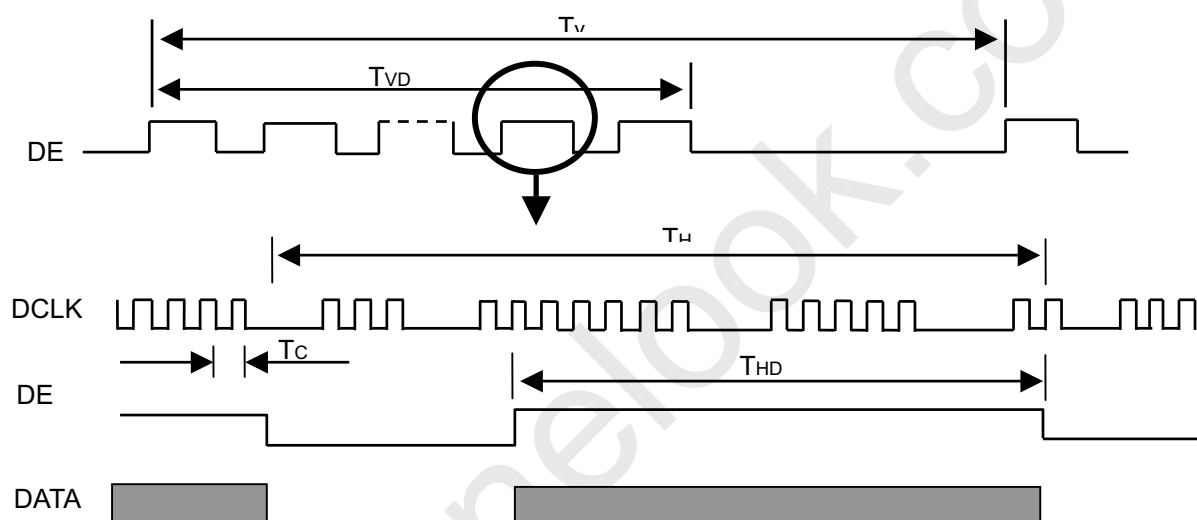

### 6.2 POWER ON/OFF SEQUENCE

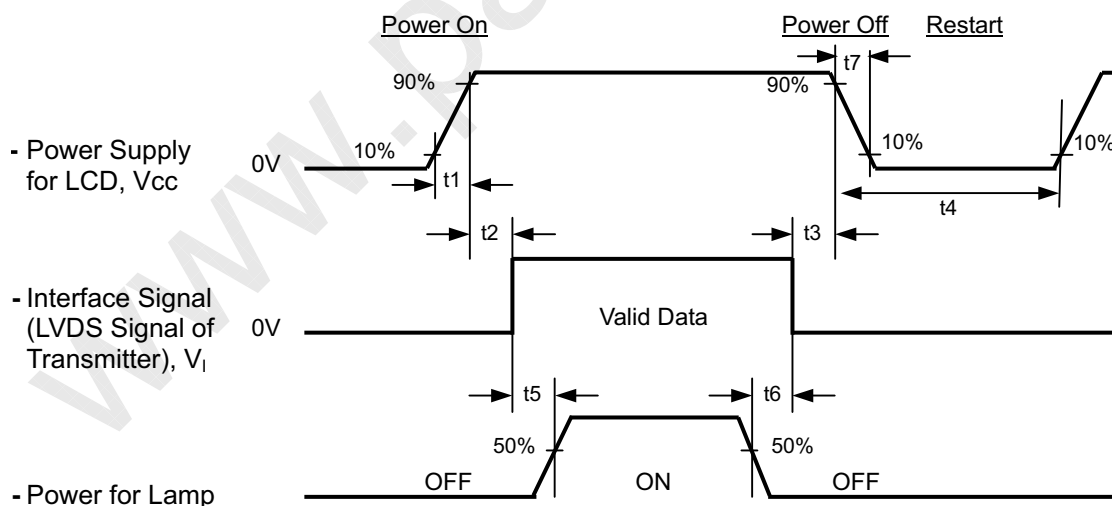

## Timing Specifications:

$$0.5\text{ms} < t_1 \leq 10 \text{ msec}$$

$$0 < t_2 \leq 50 \text{ msec}$$

$$0 < t_3 \leq 50 \text{ msec}$$

$$t_4 \geq 500 \text{ msec}$$

$$t_5 \geq 200 \text{ msec}$$

$$t_6 \geq 200 \text{ msec}$$

Note (1) Please avoid floating state of interface signal at invalid period.

Note (2) When the interface signal is invalid, be sure to pull down the power supply of LCD Vcc to 0 V.

Note (3) The Backlight inverter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight inverter power must be turned off before the power supply for the logic and the interface signal is invalid.

Note (4) Sometimes some slight noise shows when LCD is turned off (even backlight is already off). To avoid this phenomenon, we suggest that the Vcc falling time had better to follow

$$t_7 \geq 5 \text{ msec}$$

## 7 OPTICAL CHARACTERISTICS

### 7.1 TEST CONDITIONS


| Item                       | Symbol                                                        | Value | Unit |
|----------------------------|---------------------------------------------------------------|-------|------|
| Ambient Temperature        | Ta                                                            | 25±2  | °C   |
| Ambient Humidity           | Ha                                                            | 50±10 | %RH  |
| Supply Voltage             | V <sub>CC</sub>                                               | 3.3   | V    |
| Input Signal               | According to typical value in "3. ELECTRICAL CHARACTERISTICS" |       |      |
| Inverter Current           | I <sub>L</sub>                                                | 6.0   | mA   |
| Inverter Driving Frequency | F <sub>L</sub>                                                | 61    | KHz  |
| Inverter                   | Sumida-H05-4915                                               |       |      |

The measurement methods of optical characteristics are shown in Section 7.2. The following items should be measured under the test conditions described in Section 7.1 and stable environment shown in Note (6).

### 7.2 OPTICAL SPECIFICATIONS

| Item               |            | Symbol           | Condition                                                    | Min.          | Typ.  | Max.          | Unit              | Note     |
|--------------------|------------|------------------|--------------------------------------------------------------|---------------|-------|---------------|-------------------|----------|
| Contrast Ratio     |            | CR               | $\theta_x=0^\circ, \theta_y=0^\circ$<br>Viewing Normal Angle | 200           | 300   | -             | -                 | (2), (5) |
| Response Time      |            | T <sub>R</sub>   |                                                              | -             | 5     | 10            | ms                | (3)      |
|                    |            | T <sub>F</sub>   |                                                              | -             | 11    | 16            | ms                |          |
| Luminance of White |            | L <sub>AVE</sub> |                                                              | 170           | 200   | -             | cd/m <sup>2</sup> | (4), (5) |
| White Variation    |            | δW               |                                                              | -             | -     | 1.3           | -                 | (5), (6) |
| Color Chromaticity | Red        | R <sub>x</sub>   |                                                              | Typ.-<br>0.03 | 0.572 | Typ.+<br>0.03 | -                 | (1), (5) |
|                    |            | R <sub>y</sub>   |                                                              |               | 0.335 |               | -                 |          |
|                    | Green      | G <sub>x</sub>   |                                                              |               | 0.325 |               | -                 |          |
|                    |            | G <sub>y</sub>   |                                                              |               | 0.565 |               | -                 |          |
|                    | Blue       | B <sub>x</sub>   |                                                              |               | 0.152 |               | -                 |          |
|                    |            | B <sub>y</sub>   |                                                              |               | 0.132 |               | -                 |          |
|                    | White      | W <sub>x</sub>   |                                                              |               | 0.313 |               | -                 |          |
|                    |            | W <sub>y</sub>   |                                                              |               | 0.329 |               | -                 |          |
| Viewing Angle      | Horizontal | θ <sub>x+</sub>  | CR≥10                                                        | 40            | 45    | -             | Deg.              | (1), (5) |
|                    |            | θ <sub>x-</sub>  |                                                              | 40            | 45    | -             |                   |          |
|                    | Vertical   | θ <sub>y+</sub>  |                                                              | 15            | 20    | -             |                   |          |
|                    |            | θ <sub>y-</sub>  |                                                              | 40            | 45    | -             |                   |          |

Note (1) Definition of Viewing Angle ( $\theta_x$ ,  $\theta_y$ ):

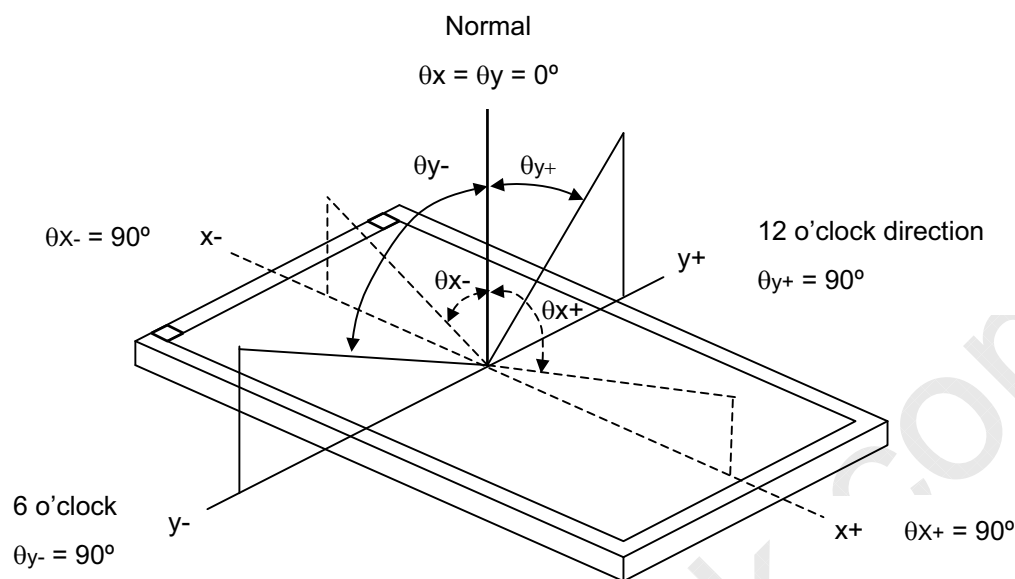

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$


L63: Luminance of gray level 63

L 0: Luminance of gray level 0

$$\text{CR} = \text{CR} (5)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time ( $T_R$ ,  $T_F$ ):

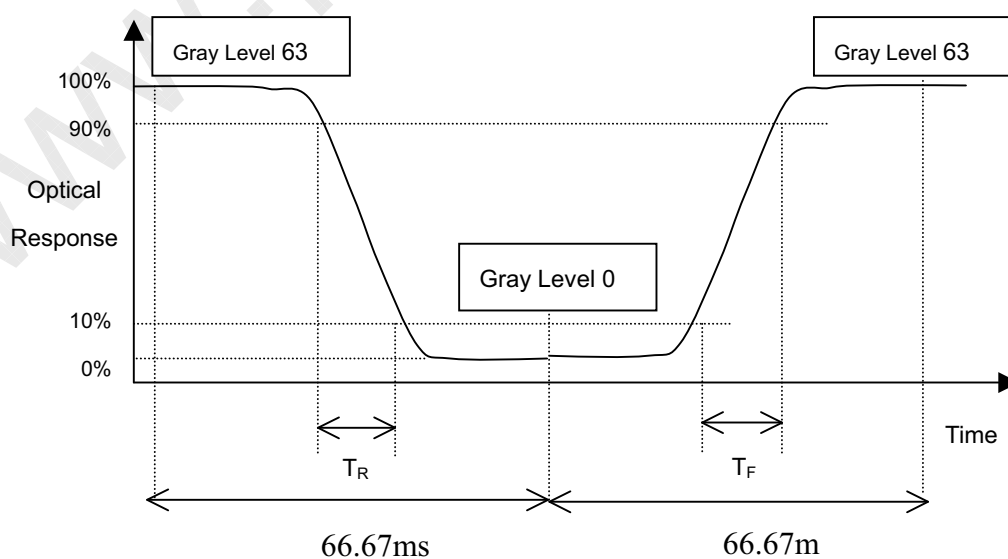

Note (4) Definition of Average Luminance of White ( $L_{AVE}$ ):


Measure the luminance of gray level 63 at 5 points

$$L_{AVE} = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$$

$L(x)$  is corresponding to the luminance of the point X at Figure in Note (6).

Note (5) Measurement Setup:


The LCD module should be stabilized at given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

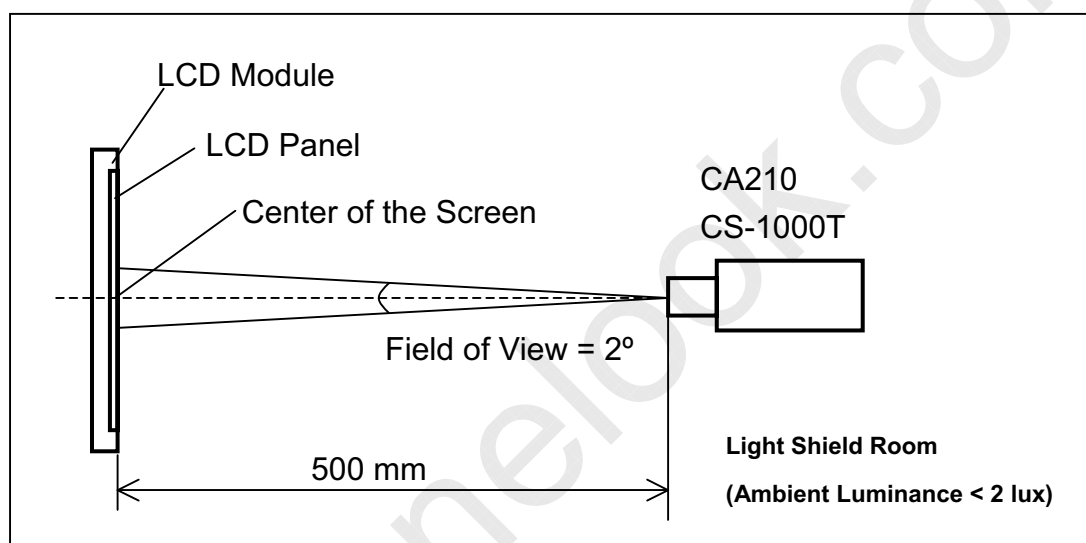

Note (6) Definition of White Variation ( $\delta W$ ):

Measure the luminance of gray level 63 at 5 points

$$\delta W = \text{Maximum } [L(1), L(2), L(3), L(4), L(5)] / \text{Minimum } [L(1), L(2), L(3), L(4), L(5)]$$

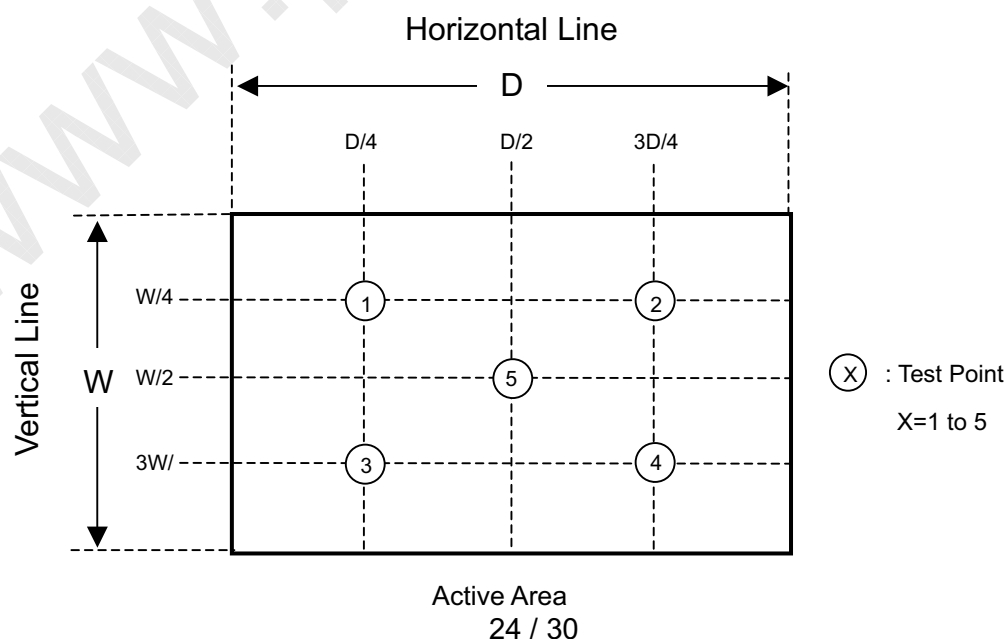



## 8 PRECAUTIONS

### 8.1 HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the lamp wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.

### 8.2 STORAGE PRECAUTIONS


- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of lamp will be higher than the room temperature.

### 8.3 OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMOS LSI chips from damage during latch-up.
- (3) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while assembling with inverter. Do not disassemble the module or insert anything into the Backlight unit.


## 9 PACKING

### 9.1 CARTON

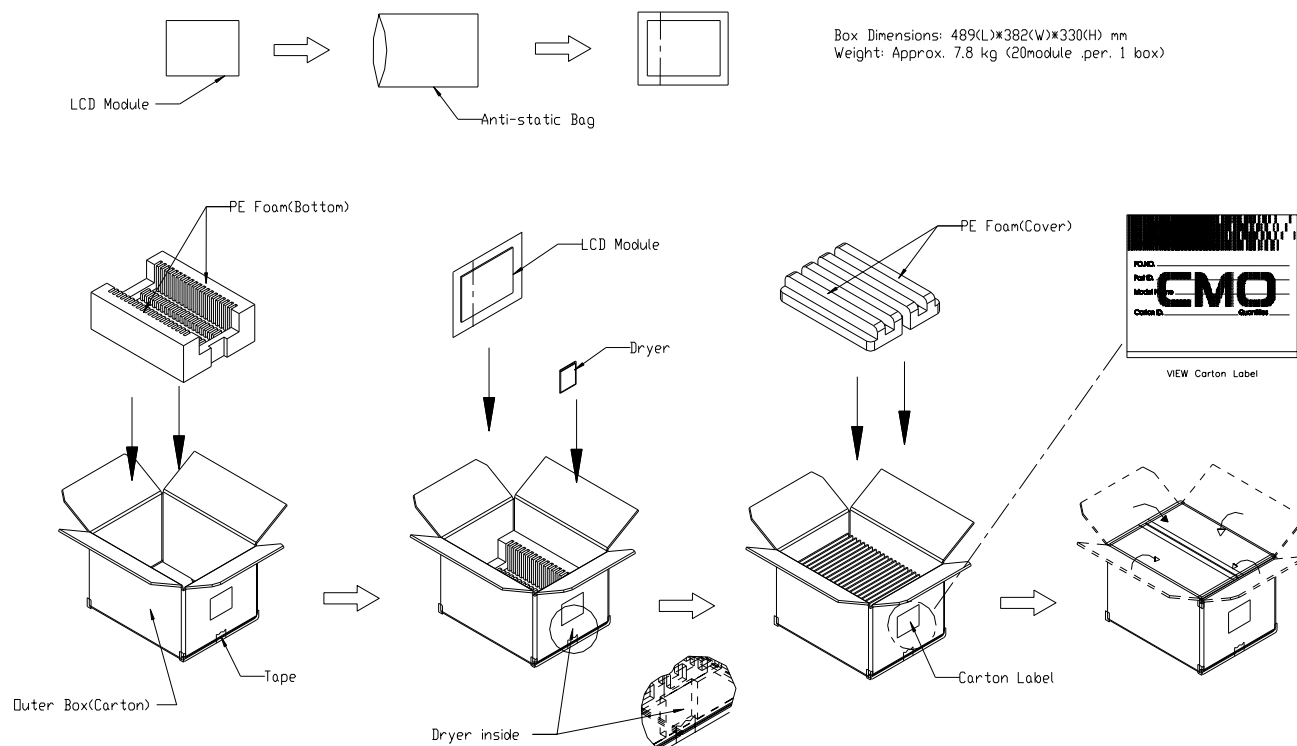



## 9.2 PALLET

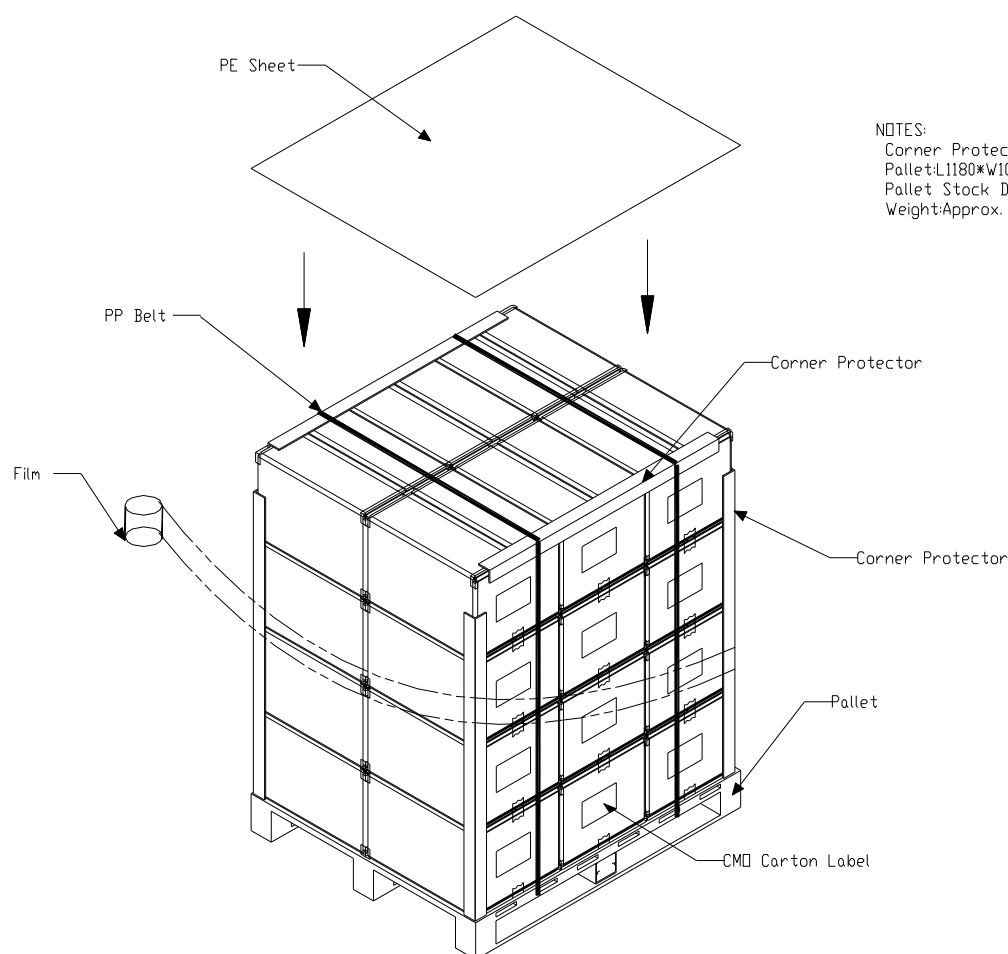


NOTES:  
Corner Protector:L1170mm\*50mm\*50mm  
Pallet:L1180\*W1000\*H135mm  
Pallet Stock Dim:L1180\*W1000\*H1465mm  
Weight:Approx. 207 kg

## 10 DEFINITION OF LABELS

### 10.1 CMO MODULE LABEL


The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.

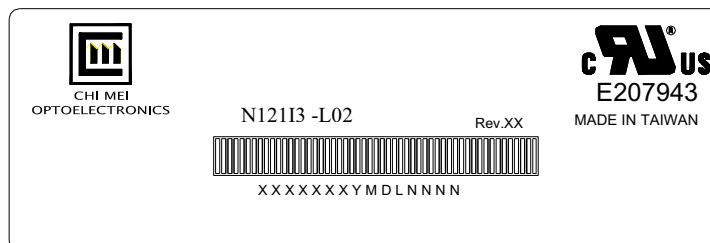

(a) Model Name: N121I3 - L02

(b) Revision: Rev. XX, for example: C1, C2 ...etc.

(c) Serial ID: XXXXXXXXYMDLNNNN

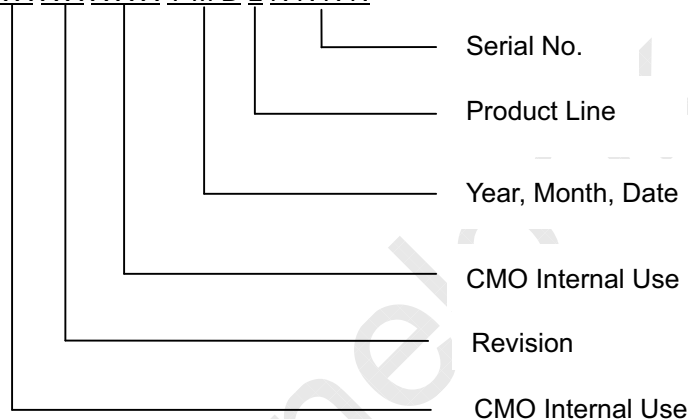

Serial ID includes the information as below:

(a) Manufactured Date: Year: 1~9, for 2001~2009

Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1<sup>st</sup> to 31<sup>st</sup>, exclude I , O and U

(b) Revision Code: cover all the change

(c) Serial No.: Manufacturing sequence of product



Issued Date: May. 30, 2006  
Model No.: N12113 -L02

**Approval**

## 10.2 CARTON LABEL

The image shows a template for a carton label. It features a blue header with the CHI MEI OPTOELECTRONICS logo and name. Below the header, there are four lines for text entry: PO.NO., Part ID., Model Name, and Carton ID. To the right of the Carton ID line is a label for Quantities. A large, light blue 'CMO' watermark is visible in the background. In the bottom right corner, there is a yellow circular logo with a red border containing the letters 'GP'. The entire label is framed by a blue border.

CHI MEI OPTOELECTRONICS


PO.NO. \_\_\_\_\_

Part ID. \_\_\_\_\_

Model Name \_\_\_\_\_

Carton ID. \_\_\_\_\_ Quantities \_\_\_\_\_

GP



|          |                                                                                                                             |             |             |       |       |                                                                                               |
|----------|-----------------------------------------------------------------------------------------------------------------------------|-------------|-------------|-------|-------|-----------------------------------------------------------------------------------------------|
| TITLE    | Outline N2123-1.01/L01/02/01902/02902  |             |             |       |       | 2D REV.41                                                                                     |
|          |                                                                                                                             |             |             |       |       | 3D REV.10                                                                                     |
| Approved | Bill Sheu                                                                                                                   | Drawing No. | N212340004  |       |       |                                                                                               |
| Checked  | Shunnan                                                                                                                     | Part No.    | NA          |       |       |                                                                                               |
| Drawer   | Philip Lau                                                                                                                  | Material    | NA          | Sheet | 1 / 1 | AI                                                                                            |
| Designer | Shunnan                                                                                                                     | Date        | 26-May-2006 | Scale | 1:1   | Unit/mm  |


CHI MEI
OPTOELECTRONICS CORP.
ALL RIGHTS RESERVED, COPYING FORBIDDEN